
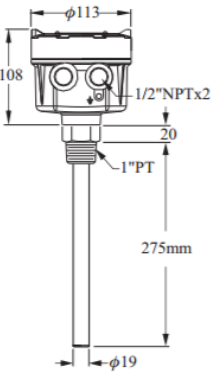
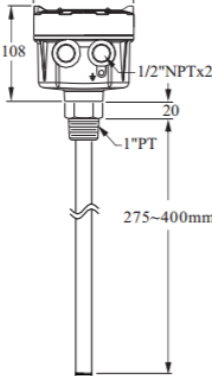
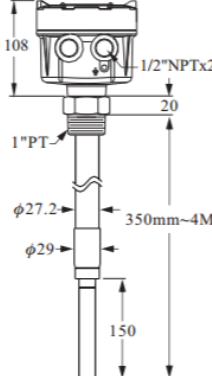
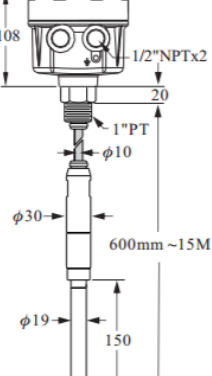
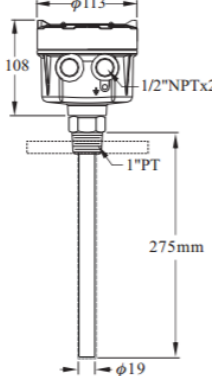


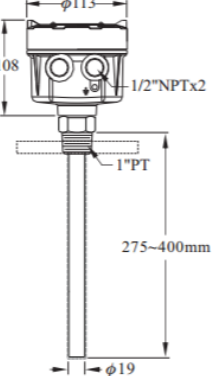

產品規格

| | | |
|-------|---|--------------------------------------|
| 品名 | 振動式物位開關 | |
| 型式 | 標準型 | 耐酸鹼型 |
| 安裝接續 | 1"PT | 1"法蘭 |
| 適用介質 | 粉體 $\geq 0.32\text{g/cm}^3$ | |
| 電氣接頭 | 1/2"NPT電氣入線口x2 | |
| 振動棒材質 | SS304 / SS316 | SS304 + TEFLON被覆 SS316 + TEFLON被覆 |
| 振動頻率 | 395Hz~405Hz | |
| 動作延遲 | 0.6~1秒動作, 2~5秒復歸 | |
| 接點規格 | RELAY, SPDT, 5A/250Vac/28Vdc SSR(MOSFET) 400mA/60Vac/Vdc | |
| 工作電源 | 20~250Vac/Vdc | |
| 操作環境 | 環境溫度-40~60°C 操作溫度-40~80°C 操作壓力-1~10bar | |
| 接線盒規格 | 鋁合金烤漆, IP65 | |
| 防爆認證 | 耐壓防爆(選購項目) | |

尺寸圖(mm)

| | | |
|---|--|--|
|  <p>Standard type diagram showing dimensions: top diameter $\phi 113$, height 108, mounting holes $1/2''\text{NPT}\times 2$, distance from top to PT 20, PT size $1''\text{PT}$, total length 275mm, bottom diameter $\phi 19$.</p> |  <p>Extended type diagram showing dimensions: top diameter $\phi 113$, height 108, mounting holes $1/2''\text{NPT}\times 2$, distance from top to PT 20, PT size $1''\text{PT}$, length 275-400mm, bottom diameter $\phi 19$.</p> |  <p>Long extended type diagram showing dimensions: top diameter $\phi 113$, height 108, mounting holes $1/2''\text{NPT}\times 2$, distance from top to PT 20, PT size $1''\text{PT}$, length 350mm-4M, bottom diameter $\phi 19$, intermediate diameters $\phi 27.2$ and $\phi 29$, and a 150mm section.</p> |
| 標準型 | 延長型 | 加長型 |
|  <p>Cable extended type diagram showing dimensions: top diameter $\phi 113$, height 108, mounting holes $1/2''\text{NPT}\times 2$, distance from top to PT 20, PT size $1''\text{PT}$, cable diameter $\phi 10$, length 600mm-15M, bottom diameter $\phi 19$, and a 150mm section.</p> |  <p>Corrosion resistant type diagram showing dimensions: top diameter $\phi 113$, height 108, mounting holes $1/2''\text{NPT}\times 2$, distance from top to PT 20, PT size $1''\text{PT}$, length 275mm, bottom diameter $\phi 19$.</p> |  <p>Corrosion resistant extended type diagram showing dimensions: top diameter $\phi 113$, height 108, mounting holes $1/2''\text{NPT}\times 2$, distance from top to PT 20, PT size $1''\text{PT}$, length 275-400mm, bottom diameter $\phi 19$.</p> |
| 電纜加長型 | 耐酸鹼型 | 耐酸鹼延長型 |

選型範例

L09 - 01 - S - P - 0 - R - N - S

型式

S: 標準型 R: 耐酸鹼型

安裝接續

P: $1''\text{PT}$ J: $1''\text{ JIS 5K}$ X: 其它

振動棒材質

0: SS304 1: SS316 2: SS304+TEFLON被覆
3: SS316+TEFLON被覆

接點規格

R: RELAY S: SSR(MOSFET)

防爆需求

N: 無 E: 耐壓防爆

振動棒長度

S: 標準 X: 自填(參考尺寸圖)